

Series  
**VENTS KSD**



Inline centrifugal fan for round ducts in heat- and sound-insulated casing. Air capacity up to **3930 m<sup>3</sup>/h**

■ **Application**

KSD fan is designed for use in supply and exhaust ventilation systems with high requirements to noise level.

■ **Design**

The fan casing is made of galvanized steel plate and heat-and sound-insulated material. The connecting flanges are fitted with rubber seals. The fan series KSD 315/250x2 are equipped with two intake flanges Ø 250 mm to facilitate synchronous air exhaust from several areas or rooms.

■ **Motor**

Four- or six-pole external rotor asynchronous motor equipped with double-inlet impeller with forward curved blades. The motor has overheating protection with automatic restart. Due to ball bearings with specially selected grease type the fan is maintenance-free and distinguished by low-noise operation.

■ **Speed control**

Smooth or step speed control with a thyristor or autotransformer speed controller. Several fans may be connected to one speed controller provided that the total power and operating current do not exceed the rated speed controller parameters.

■ **Mounting**

The inline fans are designed for mounting with round air ducts.

In case of mounting with flexible connectors the fan is attached to a building with supports, suspension or fixing brackets. The fan is suitable for mounting in any position in compliance with the air motion direction in the system (shown with pointer on the fan casing). While mounting sufficient space for fan maintenance must be provided.

**Designation key:** \_\_\_\_\_

Series	Flange diameter			Motor modification			Options
	Exhaust flange diameter	Intake flange diameter*	Number of intake flanges	High-powered motor	Number of poles	Phase	
<b>VENTS KSD</b>	250 315	/ 250	x 2	S	- 4; 6	<b>E</b> – single phase	<p><b>R</b> – power cord with IEC C14 electric plug.</p> <p><b>U</b> – speed controller with electronic thermostat and temperature sensor integrated into the air duct. Equipped with power cord and IEC C14 electric plug. Temperature-based operation logic.</p> <p><b>Un</b> – speed controller with electronic thermostat and external temperature sensor fixed on 4 m cable. Equipped with power cord and IEC C14 electric plug. Temperature-based operation logic.</p> <p><b>U1</b> – speed controller with electronic thermostat and temperature sensor integrated into the air duct. Equipped with power cord and IEC C14 electric plug. Timer-based operation logic.</p> <p><b>U1n</b> – speed controller with electronic thermostat and external temperature sensor fixed on 4 m cable. Equipped with power cord and IEC C14 electric plug. Timer-based operation logic.</p>

\* no intake flange diameter if it is equal to the exhaust flange diameter

**Accessories**



page 378   page 386   page 388   page 392   page 406   page 442   page 446   page 461   page 462   page 476   page 477   page 480

**■ The fan with electronic temperature and control module (U option).**

The ideal solution for ventilation of the premises requiring permanent temperature control, i.e. greenhouses. The fan with the electronic temperature and speed control module provides automatic control of the motor speed (air capacity) depending on air temperature in the air duct or in the room.

The front panel of the electronic module has the following control knobs:

- speed control knob for setting the motor speed;
- thermostat control knob for setting the temperature set point;
- thermostat indicator light.

The fan is available in two modifications:

- with the temperature sensor integrated inside the fan air duct (U/U1 option);
- with the external temperature sensor fixed on the cable, 4 m long (Un / U1n).

**■ Control logic of the fan with the electronic temperature and speed control module**


Set the desired air temperature (thermostat set point) by turning the thermostat control knob. Set the required minimum impeller speed (air flow) by turning the speed control knob. The motor switches to maximum speed (maximum air flow) as the temperature reaches and exceeds the set temperature set point. The motor switches to the pre-set lower speed as the temperature drops down below the temperature set point. To avoid frequent motor speed switches when the air temperature in the duct is equal to the set temperature point, the speed switch delay is activated. There are two switch delay patterns for various cases:

1. The temperature sensor-based switch delay (U option): the motor switches to higher speed as the air temperature exceeds 2 °C above the set thermostat set point. The motor reverts to the preset

lower speed as the air temperature drops below the thermostat set point. This pattern is used to keep air temperature to within 2 °C. In this case the motor speed switches are rare.

2. The timer-based switch delay (U1 option): as the air temperature exceeds the set thermostat set point, the motor switches to higher speed and the switch delay timer is activated for 5 min. The motor reverts to lower speed as the air temperature drops down below the thermostat set point and only after 5 minutes timer countdown.

This pattern is used for exact air temperature control. The speed switches for the fan with U1 option are more frequent as compared to the operating logic of the fan with U option, however the minimum operating cycle at one speed is 5 minutes.

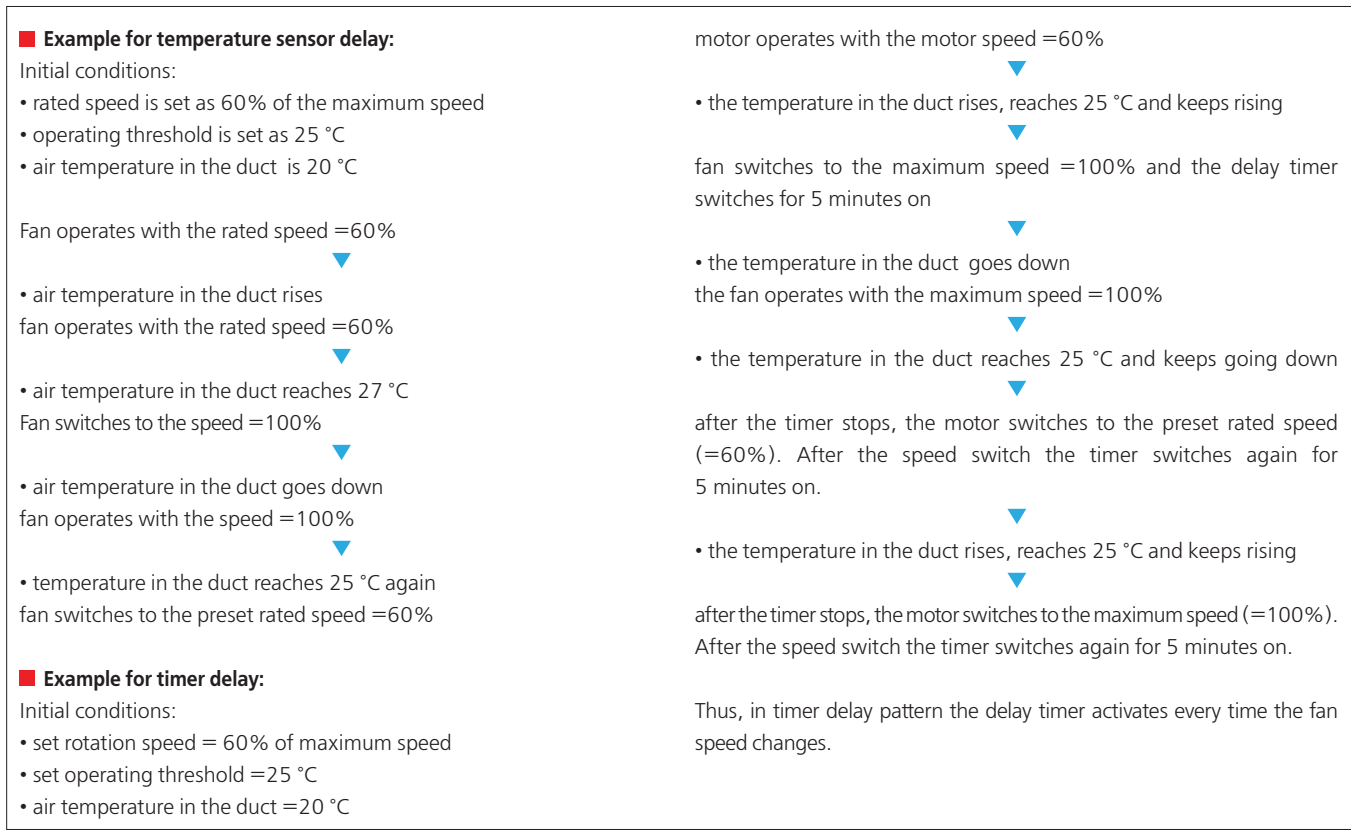

Optional supply with a fastening eye



## SOUND-INSULATED FANS

### Fan overall dimensions:

Type	Dimensions [mm]											Weight [kg]	Fig.no.
	$\varnothing D$	$\varnothing d$	B	B1	H	H1	H2	H4	L	L1	L2		
KSD 250-6E	248	20	453	400	433	298	216	470	568	470	400	30	1
KSD 250 S-6E	248	20	503	450	483	340	241	520	638	540	470	31.3	1
KSD 250-4E	248	20	453	400	433	298	216	470	568	470	400	30	1
KSD 250 S-4E	248	20	503	450	483	340	241	520	638	540	470	31.3	1
KSD 315-6E	313	20	600	550	500	340	251	537	680	580	510	31	1
KSD 315 S-6E	313	25	670	620	610	450	306	658	825	725	660	45	1
KSD 315-4E	313	20	600	550	500	340	251	537	680	580	510	33	1
KSD 315 S-4E	313	20	650	610	530	367	266	567	735	635	570	38	1





### Fan overall dimensions:

Type	Dimensions [mm]															Weight [kg]	Fig.no.
	$\varnothing D$	$\varnothing D1$	$\varnothing d$	B	B1	B2	B3	H	H1	H2	H3	H4	L	L1	L2		
KSD 315/250x2-6E	313	248	20	600	550	171	431	500	340	176	326	537	680	580	510	31	2
KSD 315/250x2 S-6E	313	248	25	670	620	216	457	610	450	186	427	658	825	725	660	45	2
KSD 315/250x2-4E	313	248	20	600	550	171	431	500	340	176	326	537	680	580	510	33	2
KSD 315/250x2 S-4E	313	248	20	650	610	188	465	530	367	186	346	567	735	635	570	38	2

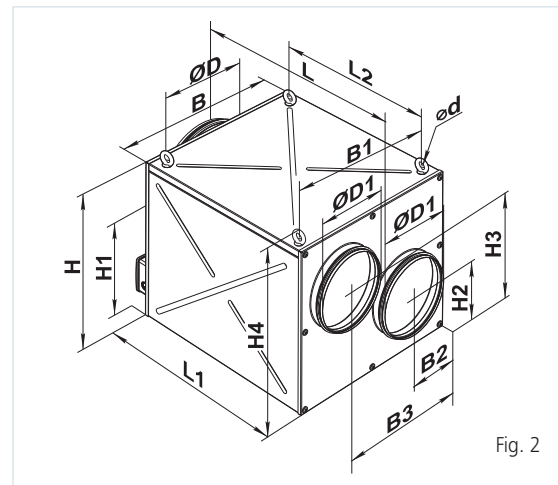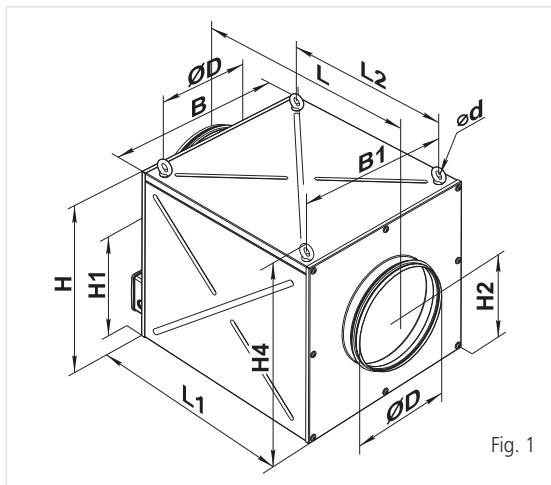

**Technical data:**

	<b>KSD 250-6E</b>	<b>KSD 250 S-6E</b>	<b>KSD 250-4E</b>	<b>KSD 250 S-4E</b>
Voltage [V / 50 Hz]	1~ 230	1~ 230	1~ 230	1~ 230
Power [W]	120	311	243	617
Current [A]	0.55	1.36	1.06	2.69
Max. air capacity [m³/h]	1210	1680	1520	2470
RPM [min <sup>-1</sup> ]	860	940	1320	1465
Noise level at 3 m [dBA]	40	41	44	46
Transported air temperature [°C]	-20...+50	-20...+50	-20...+50	-20...+50
Protection rating	IP X4	IP X4	IP X4	IP X4

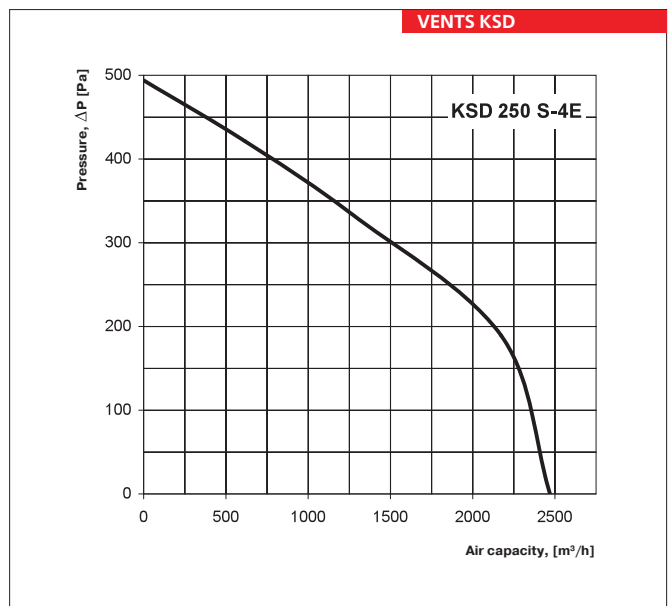
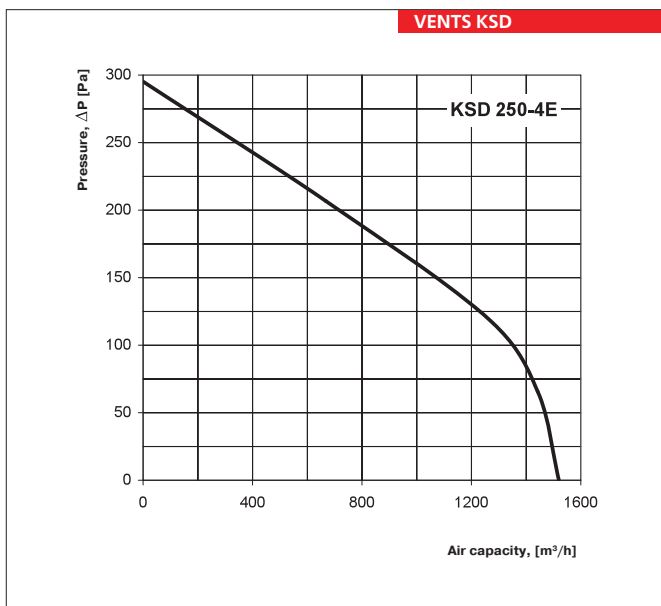
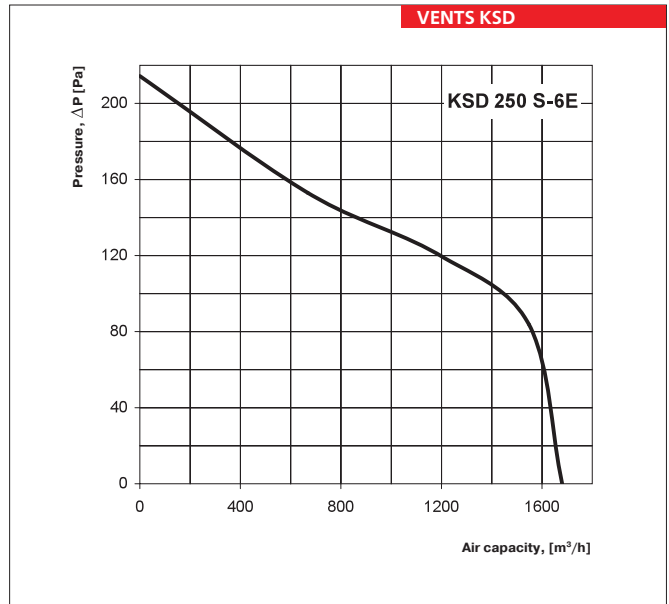
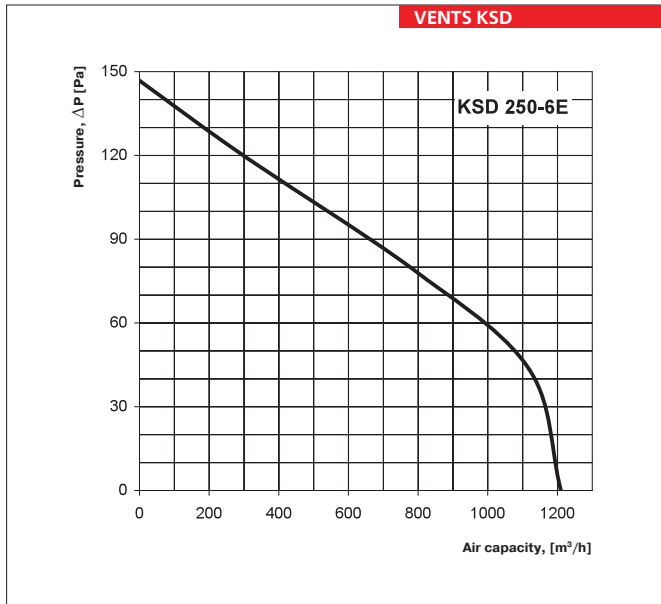


FAN SERIES  
VENTS KSD

## SOUND-INSULATED FANS





### Technical data:

	<b>KSD 315-6E</b>	<b>KSD 315 S-6E</b>	<b>KSD 315-4E</b>	<b>KSD 315 S-4E</b>
Voltage [V / 50 Hz]	1~ 230	1~ 230	1~ 230	1~ 230
Power [W]	402	800	723	931
Current [A]	2.04	4.59	3.15	4.18
Max. air capacity [m³/h]	2460	3470	3200	3520
RPM [min <sup>-1</sup> ]	920	960	1350	1430
Noise level at 3 m [dBA]	42	43	45	47
Transported air temperature [°C]	-20...+50	-20...+50	-20...+50	-20...+50
Protection rating	IP X4	IP X4	IP X4	IP X4

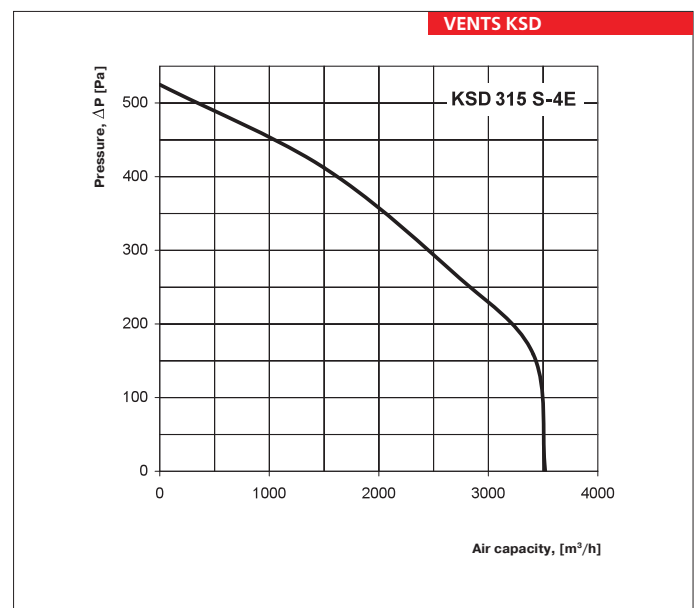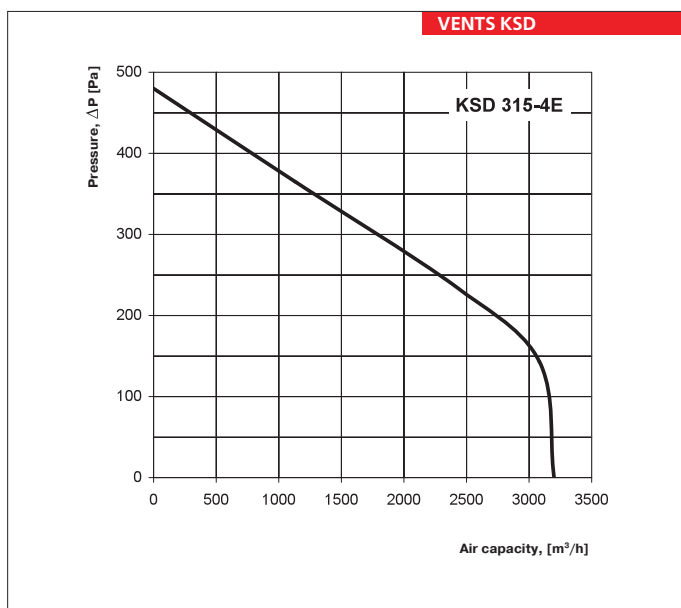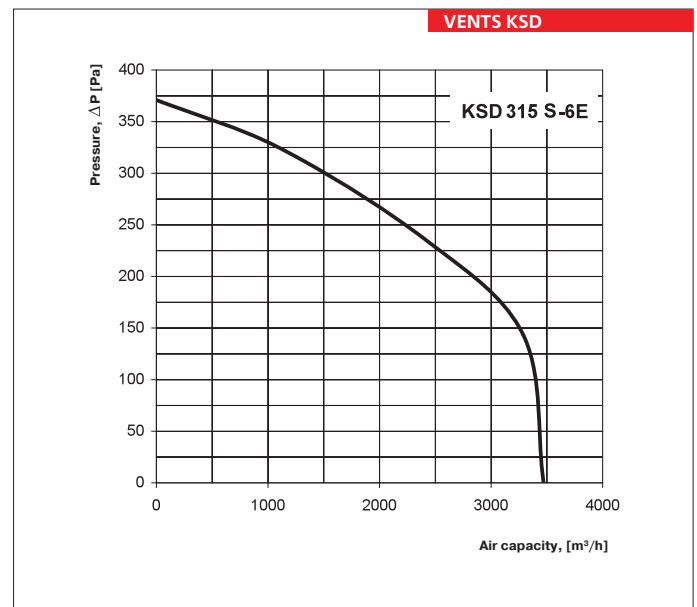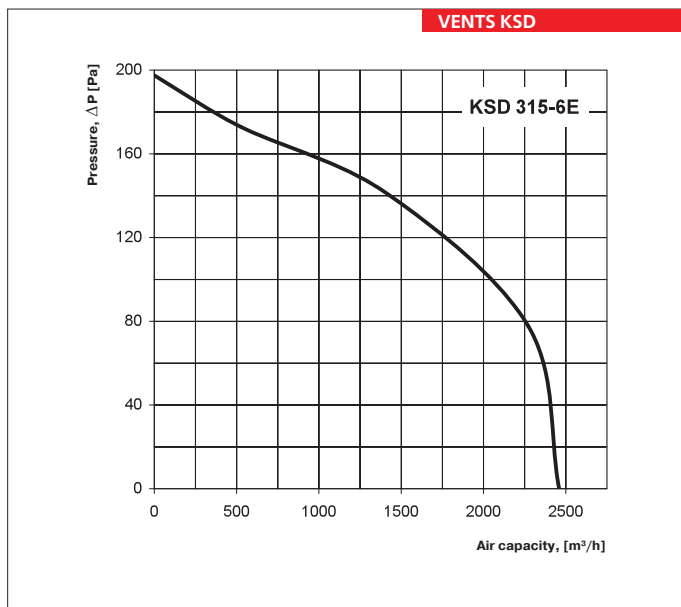

**Technical data:**

	<b>KSD 315/250x2-6E</b>	<b>KSD 315/250x2 S-6E</b>	<b>KSD 315/250x2-4E</b>	<b>KSD 315/250x2 S-4E</b>
Voltage [V / 50 Hz]	1~ 230	1~ 230	1~ 230	1~ 230
Power [W]	427	953	764	1066
Current [A]	2.13	5.06	3.36	4.78
Max. air capacity [m³/h]	2610	3850	3420	3930
RPM [min <sup>-1</sup> ]	955	970	1390	1455
Noise level at 3 m [dBA]	42	43	45	47
Transported air temperature [°C]	-20...+50	-20...+50	-20...+50	-20...+50
Protection rating	IP X4	IP X4	IP X4	IP X4

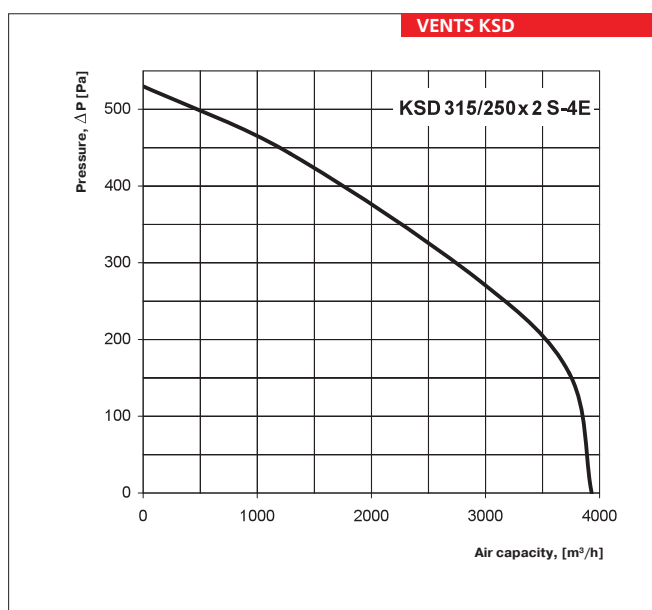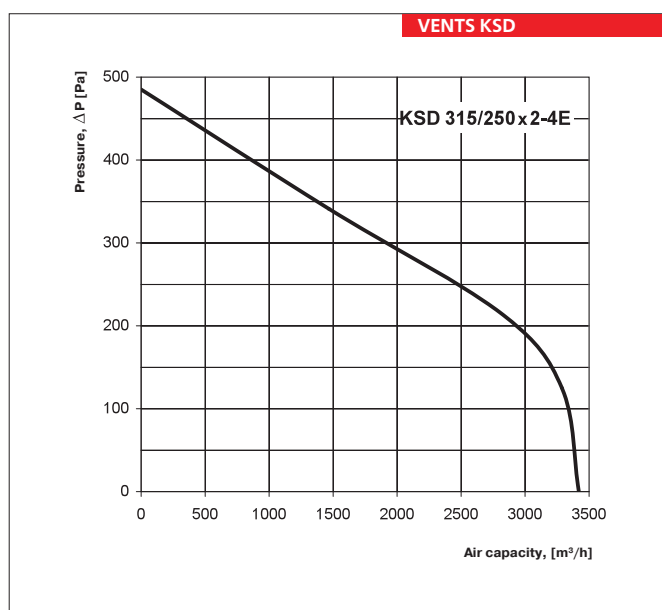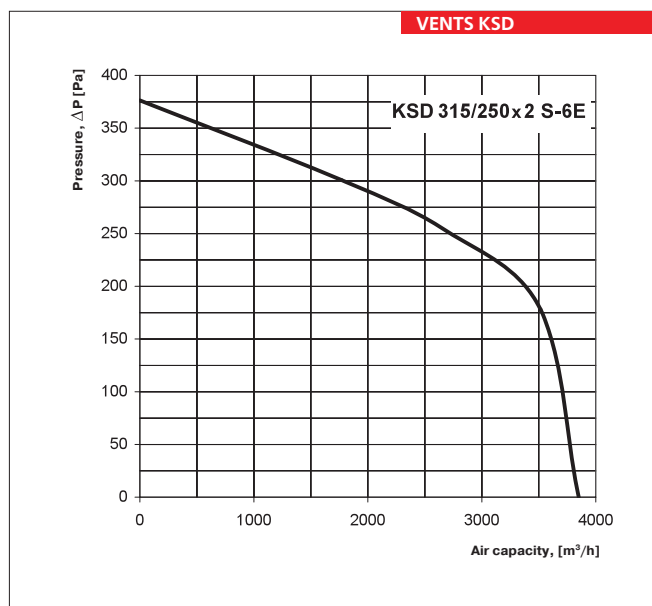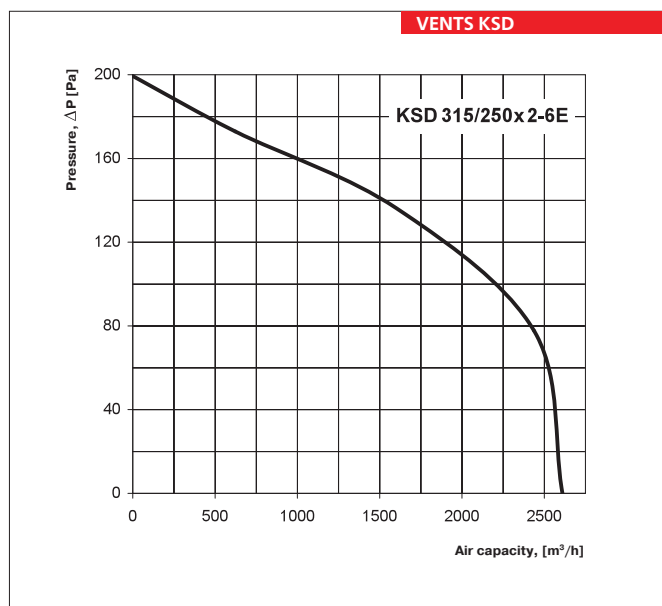

FAN SERIES  
VENTS KSD